



Europäisches Patentamt  
European Patent Office  
Office européen des brevets

Publication number:

**0 136 271**  
**A1**

## EUROPEAN PATENT APPLICATION

Application number: 84850200.1

Int. Cl.: **H 04 B 9/00**

Date of filing: 25.06.84

Priority: 01.09.83 SE 8304733

Applicant: **TELEFONAKTIEBOLAGET L M ERICSSON,**  
**S-126 25 Stockholm (SE)**

Date of publication of application: 03.04.85  
Bulletin 85/14


Inventor: **Johansson, Jan Ulf Sigvard, Nasvägen 24,**  
**S-161 42 Bromma (SE)**  
Inventor: **Forsberg, Gunnar Stefan,**  
**Ljusstjärbacken 28 C, S-117 45 Stockholm (SE)**  
Inventor: **Vucins, Viesturs Janis, Stralsjövägen 23,**  
**S-138 00 Åtta (SE)**

Designated Contracting States: **AT BE CH DE FR GB IT**  
**LI NL**

Representative: **Wennerholm, Kristian et al,**  
**TELEFONAKTIEBOLAGET L M ERICSSON,**  
**S-126 25 Stockholm (SE)**

**Apparatus for detecting tapping of light energy from an optical fiber.**

In a data transmission system where a computer side and a terminal side are connected with the aid of an optical fiber cable (FK), unauthorized tapping of light energy from some fiber in the cable can be detected. The transmitted signals are assumed to be shot-noise limited, i.e. the transmitted light is heavily superposed, whereby a large part of the transmitted light must be tapped off for listening. The computer side and terminal side contain level-sensing circuits (NVK1, NVK2) connected to respective receiver units (MD, MT) which send an alarm when tapping takes place. An optical fiber relay (RK) is connected between the fiber cable (FK) and the terminal side for short-circuiting this side in the case where a power failure can occur.

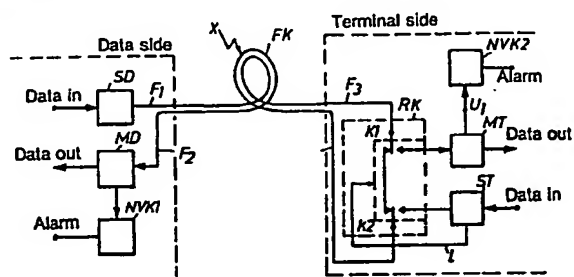

EP 0 136 271 A1

## APPARATUS FOR DETECTING TAPPING OF LIGHT ENERGY FROM AN OPTICAL FIBER

---

### TECHNICAL FIELD

The present invention relates to an apparatus for detecting tapping of light energy from a fiber in an optical glass fiber cable connected between two transmitter-receiver units, for example. More specifically, there is intended an apparatus which makes it possible to discover unauthorized listening to information which is transmitted through the cable via optical signals.

### BACKGROUND ART

A plurality of methods have been used and measures taken for preventing listening to information which is sent in the form of electrical or optical signals between two points.

One method is to encode the information which is to be transmitted in the transmitter unit and then decode this information in the receiver unit. This results in being able to use a relatively cheap transmission medium, but the encoding equipment is generally expensive and decoding by unauthorized persons is possible.

One measure is to mechanically or electromechanically protect the cable against unauthorized tampering or listening. This can also result in large costs, e.g. for mechanical protection by means of lead pipes, and does not remove the risk of listening with the aid of mechanical tampering.

A further known method consists of integrating electrical conductors into the fiber cable transmitting the information. When the cable is tampered with the capacitance between the electrical conductors is altered, which is detected and an alarm can be sent, resulting in that the information transmission can be stopped. Although this method results in sure protection against listening, high costs are unavoidable.

## DISCLOSURE OF INVENTION

In an optical glass fiber of the multimode type, the propagation of light takes place in the fiber with the aid of a plurality of propagation modes, the light being attenuated differently depending on the mode with which propagation takes place. The light spread in the fiber, with accompanying attenuation, can occur by mechanical deformation of the fiber or so-called tunnelling of the modes close to cut-off. If a fiber is intentionally tapped for light energy for the purpose of extracting transmitted information, certain modes are affected, which results in all the other modes being affected. This leads to energy being redistributed from conducting to non-conducting modes and the power distribution in the fiber core and sheath are altered.

By thus uncovering the fiber in the cable and subjecting it to bending, and collecting the leaking radiation on a photodetector there is a possibility of tapping an optical fiber for information. Another technique for tapping is also possible, e.g. by cementing the fiber into a silicon block with a bent U-shape, grinding off the fiber through the sheath to the core and connecting a detector. However, the methods result in that the optical mean power in the transmitting fiber is changed, since signal power is tapped for listening.

The apparatus in accordance with the present invention is based on the situation established above, and monitors the optical fiber cable even when one terminal is not in use.

In accordance with a characterizing feature of the invention, an optical fiber connection of usual type is monitored without any extra measures for protecting it by the optical mean power level being detected, an alarm signal being given when this is changed from a given reference value. This requires, however, that the optical signal is coded so that it has a constant mean power independent of its information content. A further distinguishing feature of the present invention is that the transmitters on both sides of the optical connection transmit heavily superposed light (so-called shot-noise limitation) through the connection. This results in that the quant noise of the transmitters will be great, but means at the same time that a receiver possibly connected into the communication will also get a high noise contribution, resulting in turn

that a large part of the transmitted light (about 50 %) must be tapped off for useful detection to take place. However, such a tap will be detected and may result in an alarm signal.

5 The apparatus in accordance with the invention is characterized as disclosed in the following claims.

#### BRIEF DESCRIPTION OF DRAWING

The invention will now be described in detail with reference to the appended drawing on which,

Figure 1 is a block diagram over send-receive sides containing an apparatus in accordance with the invention.

10 Figure 2 is a block diagram of a level monitoring circuit included in the inventive apparatus.

Figure 3 is a time chart.

Figure 4 schematically illustrates an alternative embodiment of the apparatus in accordance with the invention.

#### BEST MODES FOR CARRYING OUT THE INVENTION

15 An embodiment of the invention is illustrated in Figure 1, and applied to a computer side DS and a terminal side TS. Both computer side DS and terminal side TS can send and receive data signals via an optical fiber cable FK in a conventional manner. The cable FK is a normal, cheap, optical fiber cable without any special protective arrangements.

20 In the embodiment illustrated, the computer side DS consists of a transmitter unit SD receiving data in uncoded form and sending via the fiber link  $F_1$  an information signal which can be conventionally coded or modulated. A receiver MD included in the computer side DS receives a coded or modulated information signal in the form of light energy in the receiving fiber link  $F_2$ . The  
25 transmitter unit SD and receiver unit MD are of known embodiment. A level monitoring circuit NVK 1 is connected to the receiver MD such that it senses an electrical counterpart to the received optical signal in the fiber link  $F_2$  and when the sensed level is above or below a given value an alarm is sent.

The terminal side T comprises a photoelectric receiver MT and a transmitter ST. The input of the receiver MT is connected to the incoming fiber link F<sub>3</sub> via a switch K1, and the transmitter ST is connected to the outgoing fiber link F4 via a second switch K2. Both switches K1 and K2 are connected to each other such that when they are closed both fiber links F3 and F4 are directly connected to each other, whereby the terminal side will be optically short-circuited. When the switches K1 and K2 are open they are connected such that the optical signals in the respective fiber link are taken to the receiver MT and from the transmitter ST, respectively. The switches K1, K2 may comprise an optical fiber relay RK of a known kind described in the Swedish Patent Application 8204085-8, for example. The relay RK is steered to both its switching positions via a connection 1 from the transmitter ST so that the switches K1 and K2 are closed when the terminal (transmitter) is closed, or should current supply to the terminal side fail.

As with the computer side, the terminal side has a level monitoring circuit NVK2 connected to the receiver MT of the terminal side, for sensing an electrical correspondence to the incoming and received optical fiber signal in the link F3. The optical fiber links F1, F3 and F2, F4 are combined over the line to the optical fiber cable FK, which is of conventional implementation without any particular protection. The computer and terminal sides should be electromagnetically screened however, to prevent unauthorized listening.

If the fiber cable is tampered with at some place X, e.g. if one of the fibers is bent or uncovered so that light energy leaks out into the surroundings, the optical mean power will be changed, which is detected by the level monitoring circuit NVK2 if the relay RK is in its open position, i.e. if the terminal side is functioning normally. Should the terminal side be out of service, i.e. it has been closed, the relay K2 is in the closed position and possible light signals are taken back to the receiver MD on the computer side. Should there be possible tampering with the cable FK, an alteration of the optical fiber mean power will be sensed instead by the level monitoring circuit NVK1 and an alarm sent from this circuit.

In calculating the noise properties of an optical fiber receiver, all noise is referred to the input of the receiver where the photodiode is connected. The

higher this noise is, the poorer is the receiver's sensitiveness. Only the two most important noise contributions will be mentioned here, when the photodiode consists of a pin diode, namely

$$\text{resistive noise } N_1 = \frac{4kTB}{R} \text{ (1) and}$$

$$\text{quant noise } N_2 = 2qIB \text{ (2) where}$$

k = Boltzmann's constant

T = Absolute temperature

B = Receiver noise bandwidth

L = Receiver input resistance or transimpedance or both in parallel

10 q = Electron charge

I = Current through photodiode

The smaller the expressions (1) and (2) are, the more sensitive is the receiver. There is an optimum bandwidth B<sub>j</sub> for a given bit rate, which means that B cannot be reduced below the optimum value. On the other hand, T can be reduced and R can be made very large. This means that the expression (1) can be reduced so that the noise N<sub>1</sub> is negligible. In practice, all noise contributions can be heavily reduced except the quant noise N<sub>2</sub> according to (2).

If now a strong constant light is used, on which the information-carrying signal is superposed, the expression (2) will dominate, quite irrespective of the remaining noise properties of the receiver. In the present invention, the quant noise according to expression (2) is made great by the superposed light increasing the current I, all types of receiver thus obtaining in principle the same "poor" sensitivity. This means that if someone with a small tap at X wants to listen to the transmission of the optical signals through the communication FK, it does not pay to use a supersensitive receiver, since all types of receiver have the same sensitivity, according to the above. When the expression (2) dominates, the signal: noise relationship in the receiver is proportional to P/2qB (P = optical power). Tapping a small part of the power thus gives an insufficiently good signal in relation to the noise conditions in the listening receiver. For listening to be possible it is thus required that a relatively large part of the light power must be tapped at X, in the order of magnitude 25 %. Furthermore, the receiver at X must use the greater part of the light which the fiber FK loses, which is

impossible in practice. If such a large portion of the light is tapped, the level monitoring according to the above will come into action, however.

When the relay RK changes state, the mean power of the noise signals in the fiber is also changed. This change shall not cause an alarm in or after the  
5    respective level monitoring circuits NVK1, NVK2. These circuits can be designed so that an alteration of short duration of the mean power is not detected.

Figure 2 illustrates the block diagram for an embodiment of the level monitoring circuit NVK1 or NVK2. A differentiator DF, the input of which  
10    forms the input of the circuit, is connected by its output to the input of a lowpass filter LP. Its output is connected to one input of a comparator K, the other input of which is connected to a reference voltage  $U_{ref}$ . A voltage  $U_3$  is obtained at the comparator output, which forms the alarm output of the level monitoring circuit. The input voltage to the differentiator DF is denoted by  $U_1$ .

15    The differentiator DF and lowpass filter LP may for example comprise a feedback operation amplifier with two RC circuits, which gives a Bode diagram with two breaking points, of which the lower point occurs at low frequency (about 1 Hz).

When light energy is tapped off from the cable, there is a slow or rapid lowering  
20    of the level of the input voltage  $U_1$  to the differentiator DF, as is illustrated in the time chart according to Figure 3, between the times  $t_1$  and  $t_2$ . The lowpass filter LF gives an output voltage  $U_2$  to one input of the comparator K, this voltage being a very low-frequency signal, which due to the weak gradient of the incoming signal voltage  $U_1$  is given a low value after the differentiation. In  
25    Figure 3 the gradient of the voltage  $U_1$  between the times has been exaggerated better to illustrate the sequence. The low level of  $U_2$  is compared in the comparator K with a reference level  $U_{ref}$  of a suitably selected size, and if the level of  $U_2$  falls below the reference level  $U_{ref}$  an output voltage  $U_3$  comes from the comparator, this voltage constituting the alarm signal.

30    As mentioned above, switching of the relay RK is obtained for an activation signal via the connection 1. This generally gives rise to an alteration of short

duration of the light flow in the fiber F3-F4, which is assumed to result in a voltage crest at the time  $t_3$  in Figure 3. An unillustrated delay circuit may possibly be connected after the comparator K to give an output signal U3, only if the voltage decline in U2 has existed for a given time  $t_2-t_1$ .

- 5 In the embodiment described above the level-sensing or level monitoring circuit measures an alteration in an electric signal, corresponding to the light level in the fiber, relative a reference level, i.e. a relative change in level. It is also possible to measure the absolute level of the optical power, or a combination of both.
- 10 The optical fiber relay RK connected on the terminal side is used to obtain a detection signal on the computer side in the case where the terminal side is closed or has a power failure. In another embodiment of the apparatus, a relay may be connected in a similar way on the computer side as well, for obtaining a detection signal on the terminal side should there be a power failure on the
- 15 computer side.

It is also possible to obtain a detection signal on the terminal side (or the dator side) by utilizing an optical fiber parallel connection instead of a relay according to Figure 1. Figure 4 schematically illustrates how such a connection in parallel can be carried out. The computer side sends out the power  $P_1$  and a

20 portion  $P_2$  of the power  $P_1$  is tapped. The power  $P_2+P_3$  is then sent back again to the computer side. Since  $P_2 \ll P_3$ , the information embodied in the power  $P_2$  has no effect on the computer side, since digital receivers can withstand considerable crosstalk from other channels.

If there is a power failure on the terminal side, the power  $P_3=0$  and only the

25 power  $P_2$  is sent back again to the computer side. The power  $P_2$  is indeed so weak that the computer side cannot detect any information in  $P_3$ . This is entirely without significance however. The main thing is that the level monitoring circuit NVK1 on the computer side is in the case sufficiently sensitive to detect possible changes in the power  $P_2$ . The circuit NVK1 is

30 sufficiently sensitive, since it works within a very narrow frequency range. The disadvantage in tapping optical fiber power according to Figure 4 is however that greater losses are obtained than if an optical fiber relay is used.




It has been assumed in the above embodiment that a rupture can occur in the current supply, resulting in the use of an optical fiber connecting means. If current supply can always be maintained to the terminal side, no such optical fiber connection means (relay or optical parallel connection) is needed.

CLAIMS


1. Apparatus for detecting possible tapping of light energy from any of the fibers in an optical fiber cable, which connects a first transmitter-receiver side (SD,MD) with a second transmitter-receiver side (ST,MT) in a data transmission system where the transmitters send shot-noise-limited light, i.e. heavily superposed light, there being disposed level sensing units (NVK1,NVK2) in the receiver units (MT,MD) of both transmitter-receiver sides, for sensing the level of signals corresponding to the level of received light and for sending an alarm signal if said level substantially deviates from a given reference level, characterized in that optical fiber means (RK) are disposed at least at the second transmitter-receiver side (ST,MT), for linking further the light from the transmitter (SP) of the first transmitter-receiver side back again to the receiver (MD) of the same side should transmitting light fail from the transmitter (ST) of the second transmitter-receiver side.
2. Apparatus as claimed in claim 1, characterized in that said optical fiber means are disposed at the first transmitter-receiver side (SD,MD) also, for linking further the light from the transmitter (ST) of the second transmitter-receiver side back again to the receiver (MT) of the same side should transmitting light fail from transmitter (SD) of the first transmitter-receiver side.
3. Apparatus as claimed in claims 1-2, characterized in that said optical fiber means comprise an optical fiber relay (RK).

-1/1-


0136271

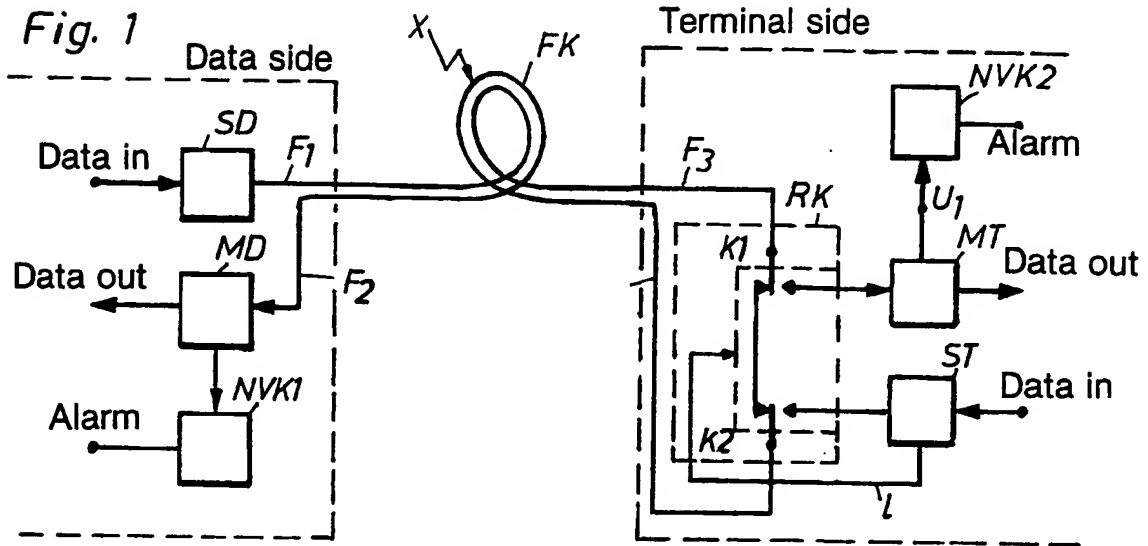


**Fig. 2**

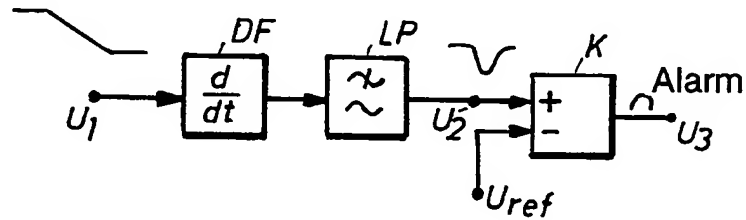

**Fig. 3**

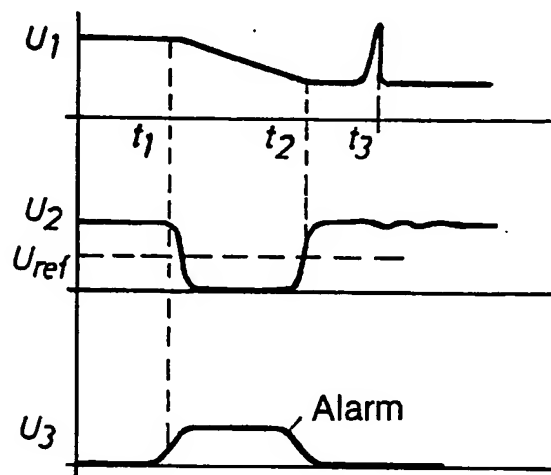

**Fig. 4**

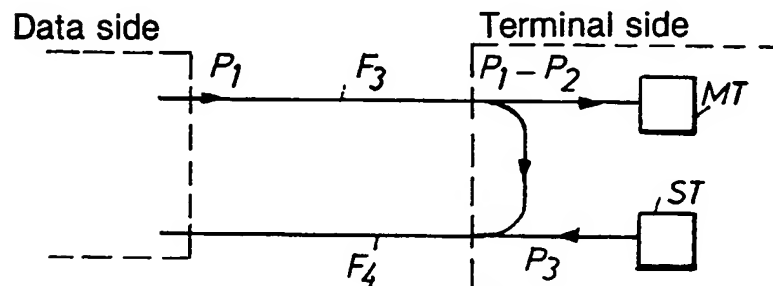



DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 7)
A	GB-A- 2 060 869 (STANDARD TELEPHONES AND CABLES LIMITED) *page 1, lines 20-40* ---	1-3	H 04 B 9/00
A	GB-A- 2 073 877 (HARTMANN & BRAUS AG) *page 1, lines 5-47* ---	1-3	
A	US-A- 4 148 558 (SCHUCK) *figures 1-3* ---	1-3	
A	US-A- 4 217 488 (HUBBARD) *column 16, lines 30-38* ---	1	
A	Japan patent abstracts 56-10 747(A) Patent abstracts of Japan. Unexa- mined appl. E field, Vol. 5, No 59 (E-53) Tokyo (HITACHI SEISA KUSHO K.K) ---	1-3	TECHNICAL FIELDS SEARCHED (Int. Cl. 7)
A	Japan patent abstracts 56-42 445(A) Patent abstracts of Japan. Unexa- mined appl. E field, Vol. 5, No 099 (E-63) Tokyo (MEIDENSHA K.K) ---	1-3	H 04 B G 02 B
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
STOCKHOLM		15-08-1984	LANDSTRÖM R.
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	